




STYLE A, F OR G  
SEE PART NUMBER

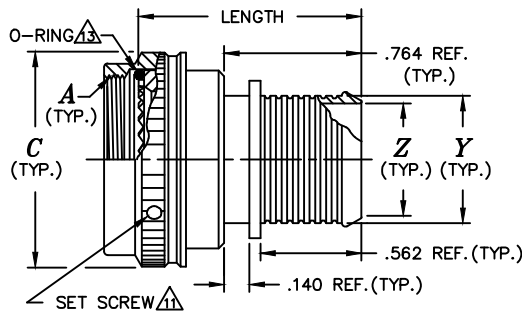


STYLE S

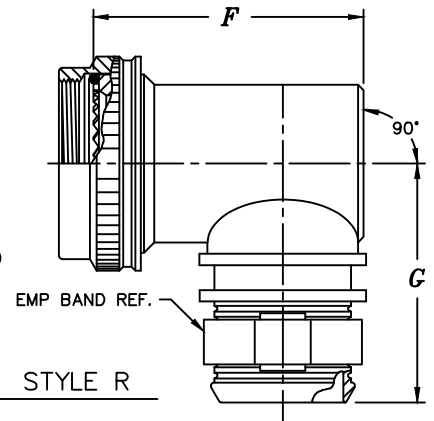


STYLE R




MODIFICATION C  
(HELICAL CONDUIT THREAD)



MODIFICATION Z  
(LESS BOOT GROOVE)



STYLE B



2 PIECE

*Example Part Number*

21741S161030855H

BASIC ADAPTER NUMBER

STYLE  
 S = STRAIGHT F = 30°  
 A = 45° G = 60°  
 R = 90° B = BASIC

ORDER NO. PER TABLE II

MODIFICATION CODE  
 S = SELF LOCKING ROUND COUPLING.  
 Z = LESS BOOT GROOVE, OMIT FOR STANDARD BOOT GROOVE  
 C = HELICAL CONDUIT THREAD

MILITARY SPECIFICATION	SERIES	CODE NO.
MIL-DTL-5015D	3100	1 8
MIL-DTL-83723	II	1 9
MIL-DTL-26482	1	2 1
MIL-DTL-26482	1 (07)	2 4
MIL-DTL-28840	-	3 0
MIL-DTL-22992	-	3 2
MIL-DTL-38999	III & IV	40
MIL-DTL-38999	I & II	41
LN 29729, PATT 615, PAN 6433-2,	-	47
MIL-DTL-26500	(ALUMINUM)	5 1
MIL-DTL-5015G	3400	54
MIL-C-81703	3	54
MIL-DTL-83723	I	54
MIL-DTL-26482	2	54
MIL-DTL-83723	III	54
NAS1599	-	54
MIL-C-81511	1, 2, 3 & 4	6 1
PATT 105, PATT 603, PATT 608	-	76

ENTRY ORDER NO.	EMP BAND			HELICAL CONDUIT		
	Z +.010 -.020 DIA.	Y ±.015 DIA.	X MAX DIA.	CONDUIT THREAD SIZE	W REF. DIA.	V ±.015 DIA.
0 2	.125	.209	N/A	N/A	N/A	N/A
0 3	.188	.271	N/A	N/A	N/A	N/A
0 4	.250	.334	N/A	N/A	N/A	N/A
0 5	.312	.396	.734	0188	.188	.413
0 6	.375	.459	.734	0281	.281	.507
0 7	.438	.521	.858	0312	.312	.531
0 8	.500	.584	.858	0375	.375	.603
0 9	.562	.646	N/A	0438	.438	.664
1 0	.625	.709	1.112	0500	.500	.743
1 2	.750	.834	1.345	0625	.625	.863
1 4	.875	.959	1.345	N/A	N/A	N/A
1 6	1.000	1.084	1.594	0750	.750	1.023
1 8	1.125	1.209	1.594	0875	.875	1.166
1 9	1.188	1.209	1.594	N/A	N/A	N/A
2 0	1.250	1.334	1.969	1000	1.000	1.319
2 2	1.375	1.459	2.219	N/A	N/A	N/A
2 4	1.500	1.584	2.219	1250	1.250	1.632

PLATING CODE NUMBER

55 = CADMIUM, OLIVE DRAB, PER SAE-AMSQQ-P-416, TYPE II, CLASS 3, OVER ELECTROLESS NICKEL PER AMS-C-26074, CLASS 3 OR 4, GRADE B  
 56 = ELECTROLESS NICKEL PER SAE-AMS-2404F, WITH IRIDITE CONVERSION  
 FOR ADDITIONAL FINISH OPTIONS, SEE CATALOG TABLE 4.

LENGTH CODE NUMBER

SELECT LENGTH IN 1/4" INCREMENTS (ie; 08=2.00", 09=2.25", etc.)  
 00 FOR 45° & 90° ADAPTERS ( STYLES A & R )

MIN. AVAIL. LENGTH	CONNECTOR CODES (TABLE I)
1.250	18, 21, 40, 41, 47, 51, 52, 54, 55, 71
1.500	24, 30, 32, 61, 64

TERMINATION NUMBER

- 1 = ADAPTER ONLY
- 4 = ADAPTER w/ 1/4" EMP BAND (REF. 214L0002)
- 5 = ADAPTER w/ 1/4" EMP BAND AND SHRINK BOOT
- 6 = ADAPTER w/ 1/8" EMP BAND (ENTRY 13-24 CUSTOMER SUPPLIED)
- 7 = ADAPTER w/ 1/8" EMP BAND (ENTRY 13-24 CUSTOMER SUPPLIED)
- 8 = ADAPTER w/ 1/8" EMP BAND (REF. 214L0005)
- 9 = ADAPTER w/ 1/4" EMP BAND (A10086)


\* THIS DOCUMENT INCOMPLETE WITHOUT "INTERFACE SPECIFICATION SHEET".

UNCONTROLLED COPY



**TABLE II - CONNECTOR CODE 18**  
**MIL-C-5015D, 3100 SERIES**

ORDER NO.	SHELL SIZE	MFR. CODE △	A UNIFIED THD. CLASS 2B	C MAX. DIA.	D MAX.	E MAX. △	F MAX.	G MAX. △/△	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
08B	8S	B	.375-32	.719	.68	1.15	.94	1.28	0 4	0 5
08C	8S	C	.438-28	.719	.69	1.16	1.00	1.28	0 5	0 7
08A	8S	A	.438-27	.719	.69	1.16	1.00	1.28	0 5	0 7
08D	8S	D	△9	.719	.69	1.16	1.00	1.28	0 5	0 7
10-	10S	-	.500-28	.781	.70	1.17	1.06	1.31	0 6	0 8
11C	10SL	C	.562-24	.844	.72	1.19	1.13	1.34	0 7	0 9
11A	10SL	A	.625-24	.906	.73	1.20	1.19	1.38	0 8	1 0
11B	10SL	B	.625-24	.906	.73	1.20	1.19	1.38	0 8	1 0
11D	10SL	D	△9	.906	.73	1.20	1.19	1.38	0 8	1 0
12B	12,12S	B	.625-24	.906	.73	1.20	1.19	1.38	0 8	1 0
12C	12,12S	C	.625-24	.906	.73	1.20	1.19	1.38	0 8	1 0
12A	12,12S	A	.688-24	.969	.74	1.21	1.25	1.41	0 9	1 0
12D	12,12S	D	△9	.969	.74	1.21	1.25	1.41	0 9	1 0
14-	14,14S	-	.750-20	1.031	.76	1.23	1.31	1.44	1 0	1 2
16-	16,16S	-	.875-20	1.219	.78	1.25	1.44	1.53	1 2	1 6
18-	18	-	1.000-20	1.344	.79	1.26	1.50	1.59	1 3	1 6
20-	20	-	1.125-18	1.469	.83	1.30	1.69	1.66	1 6	2 0
20R	20	R	1.125-24	1.469	.83	1.30	1.69	1.66	1 6	2 0
20D	20	D	△9	1.469	.83	1.30	1.69	1.66	1 6	2 0
22-	22	-	1.250-18	1.594	.86	1.33	1.81	1.72	1 8	2 0
24-	24	-	1.375-18	1.719	.89	1.36	1.94	1.78	2 0	2 4
28-	28	-	1.625-18	1.969	.91	1.38	2.06	1.88	2 2	2 4
32B	32	B	1.875-16	2.219	.96	1.43	2.31	2.00	2 4	2 4
32C	32	C	1.875-16	2.219	.96	1.43	2.31	2.00	2 4	2 4
32A	32	A	1.906-18	2.219	.96	1.43	2.31	2.00	2 4	2 4
32R	32	R	1.906-18	2.219	.96	1.43	2.31	2.00	2 4	2 4
32D	32	D	△9	2.219	.96	1.43	2.31	2.00	2 4	2 4
36B	36	B	2.062-16	2.469	1.01	1.48	2.56	2.13	2 4	2 4
36R	36	R	2.062-20	2.469	1.01	1.48	2.56	2.13	2 4	2 4
36C	36	C	2.125-16	2.469	1.01	1.48	2.56	2.13	2 4	2 4
36A	36	A	2.125-18	2.469	1.01	1.48	2.56	2.13	2 4	2 4
36D	36	D	△9	2.469	1.01	1.48	2.56	2.13	2 4	2 4
40B	40	B	2.312-16	2.719	1.07	1.54	2.81	2.25	2 4	2 4
40A	40	A	2.375-16	2.719	1.07	1.54	2.81	2.25	2 4	2 4
40C	40	C	2.375-16	2.719	1.07	1.54	2.81	2.25	2 4	2 4
40D	40	D	△9	2.719	1.07	1.54	2.81	2.25	2 4	2 4
44A	44	A	2.625-16	2.969	1.12	1.59	3.06	2.38	2 4	2 4
44C	44	C	2.625-16	2.969	1.12	1.59	3.06	2.38	2 4	2 4
44D	44	D	△9	2.969	1.12	1.59	3.06	2.38	2 4	2 4
48C	48	C	2.812-18	3.219	1.17	1.64	3.31	2.50	2 4	2 4
48A	48	A	2.875-16	3.219	1.17	1.64	3.31	2.50	2 4	2 4
48D	48	D	△9	3.219	1.17	1.64	3.31	2.50	2 4	2 4



MFR. CODE D<sup>△9</sup>△<sub>12</sub>  
 ( CODE 18 ONLY )

- NOTES:
- ASSEMBLY IDENT. PER MIL-STD-130.
  - MATERIAL: COMPONENTS - ALUM. ALLOY  
O-RING - SILICONE
  - △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
  - △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
  - △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
  - △6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
  - △9 ACCOMODATES ALL CONN. THD. SIZES.
  - △11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
  - △12 A = AMPHENOL - CLASS A  
B = BENDIX - CLASS A, E, & R  
C = CANNON - CLASS A, E, & R  
D = MFR. UNKNOWN - CLASS A, E, & R  
R = AMPHENOL - CLASS R  
- = MFR. CODE NOT REQUIRED
  - △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
  - △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
  - △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
  - △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
  - △17 FOR CODES 36 AND 38 SELF-LOCKING HEX COUPLING IS STANDARD. "H" MOD. IS SELF-LOCKING SQUARE COUPLING.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY



**TABLE II — CONNECTOR CODE 21  
 MIL-C-26482, SERIES 1**

ORDER NO.	SHELL SIZE	<i>A</i> UNIFIED THD. CLASS 2B	<i>C</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX. ⚠	<i>F</i> MAX.	<i>G</i> MAX. ⚠⚠	<i>H</i> MAX. DIA.	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
0 8	8	.438-28	.703	.62	1.16	1.00	1.28	.813	0 5	0 7
1 0	10	.562-24	.827	.63	1.17	1.06	1.34	.938	0 6	0 8
1 2	12	.688-24	.953	.66	1.20	1.19	1.41	1.125	0 8	1 0
1 4	14	.812-20	1.077	.69	1.23	1.31	1.47	1.250	1 0	1 2
1 6	16	.938-20	1.203	.71	1.25	1.44	1.53	1.375	1 2	1 6
1 8	18	1.062-18	1.327	.74	1.28	1.56	1.59	1.500	1 4	1 8
2 0	20	1.188-18	1.453	.76	1.30	1.69	1.66	1.625	1 6	2 0
2 2	22	1.312-18	1.577	.79	1.33	1.81	1.72	1.750	1 8	2 0
2 4	24	1.438-18	1.703	.82	1.36	1.94	1.78	1.875	2 0	2 4

**NOTES:**

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O’RING — SILICONE
- ⚠ 3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- ⚠ 4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- ⚠ 5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- ⚠ 6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- ⚠ 11 PROVIDED ON CONNECTOR CODES 18, 21, 22 AND 51.
- ⚠ 13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- ⚠ 14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- ⚠ 15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- ⚠ 16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
- ⚠ 17 FOR CODES 36 AND 38 SELF-LOCKING HEX COUPLING IS STANDARD. "H" MOD. IS SELF-LOCKING SQUARE COUPLING.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY



**TABLE II — CONNECTOR CODE 22  
 BENDIX, COMMERCIAL, PT\*\*CE**

ORDER NO.	SHELL SIZE	A UNIFIED THD. CLASS 2B	ØC MAX.	D MAX.	E MAX. △4	F MAX.	G MAX. △4 △6	ØH ±.031	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
0 8	8	.438-28	.72	.85	1.16	1.375	1.30	.562	0 5	0 7
1 0	10	.562-24	.85	.88	1.17	1.375	1.35	.688	0 6	0 8
1 2	12	.688-24	.97	.93	1.20	1.594	1.40	.812	0 8	1 0
1 4	14	.812-20	1.10	.98	1.23	1.688	1.50	.938	1 0	1 2
1 6	16	.938-20	1.22	1.03	1.25	1.906	1.55	1.062	1 2	1 6
1 8	18	1.062-18	1.35	1.06	1.28	1.969	1.60	1.188	1 4	1 8
2 0	20	1.188-18	1.47	1.10	1.30	2.188	1.65	1.312	1 6	2 0
2 2	22	1.312-18	1.60	1.16	1.33	2.250	1.75	1.438	1 8	2 0
2 4	24	1.438-18	1.72	1.25	1.36	2.281	1.80	1.562	2 0	2 4

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18, 21, 22 AND 51.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.


\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY



**TABLE II — CONNECTOR CODE 24  
 MIL-C-26482, SERIES 1 (07)**

ORDER NO.	SHELL SIZE	<i>A</i> UNIFIED THD. CLASS 2A	<i>C</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX. △4	<i>F</i> MAX.	<i>G</i> MAX. △4	∅ <i>H</i> ±.031	△3
0 8	8	.625-24	.781	.79	1.15	1.47	1.38	.750	0 5
1 0	10	.750-20	.906	.81	1.17	1.72	1.44	.875	0 6
1 2	12	.875-20	1.031	.84	1.20	1.78	1.50	1.000	0 8
1 4	14	1.000-20	1.156	.86	1.23	1.91	1.56	1.125	1 0
1 6	16	1.125-18	1.281	.89	1.25	2.06	1.63	1.250	1 2
1 8	18	1.250-18	1.406	.90	1.26	2.16	1.69	1.375	1 4
2 0	20	1.375-18	1.531	.99	1.29	2.28	1.75	1.500	1 6
2 2	22	1.500-18	1.656	1.01	1.32	2.35	1.81	1.625	1 8
2 4	24	1.625-18	1.781	1.04	1.34	2.41	1.88	1.750	2 0

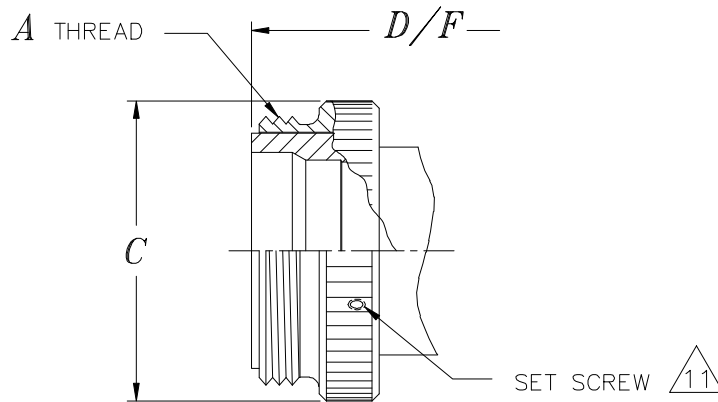

CODE 24 ONLY

NOTES:

- 1. ASSEMBLY IDENT. PER MIL-STD-130.
- 2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O'RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18, 21, 22, 24 AND 51.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-24	DR ATP 10/11/06	CHK G.FISH 10/11/06	APP GF	REV. A
--	---	---	--------------------	-----------------	-----------------------	---------------------------	-----------	-----------

UNCONTROLLED COPY



TABLE II — CONNECTOR CODE 35  
 MIL-C-38999, SERIES III & IV  $\triangle_{18}$

ORDER NO.	SHELL SIZE		A METRIC THD. CLASS 6H	$\phi C$ MAX.	D MAX.	E MAX. $\triangle_4$	F MAX.	G MAX. $\triangle_4$	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	COM'L.	MIL.								
0 8	9	A	M12 x 1.0	.750	.52	1.15	.84	1.28	0 4	0 5
1 0	11	B	M15 x 1.0	.850	.54	1.17	.97	1.34	0 6	0 8
1 2	13	C	M18 x 1.0	1.000	.57	1.20	1.09	1.41	0 8	1 0
1 4	15	D	M22 x 1.0	1.100	.59	1.23	1.22	1.47	1 0	1 2
1 6	17	E	M25 x 1.0	1.250	.62	1.25	1.34	1.53	1 2	1 6
1 8	19	F	M28 x 1.0	1.400	.63	1.26	1.41	1.59	1 3	1 6
2 0	21	G	M31 x 1.0	1.500	.66	1.29	1.53	1.66	1 5	1 8
2 2	23	H	M34 x 1.0	1.650	.68	1.32	1.66	1.72	1 7	2 0
2 4	25	J	M37 x 1.0	1.750	.71	1.34	1.78	1.78	1 9	2 0


NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- $\triangle_3$  "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- $\triangle_4$  DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- $\triangle_5$  FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- $\triangle_{11}$  PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- $\triangle_{13}$  NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- $\triangle_{14}$  FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- $\triangle_{15}$  FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- $\triangle_{16}$  FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
- $\triangle_{18}$  WHEN MATED TO CONNECTOR INTERFACE SHALL PROVIDE A WATER-TIGHT SEAL MEETING THE REQUIREMENT OF MIL-C-85049, PARA.3.5.7

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-35	DR ATP 9/14/99	CHK CF	APP 09/14/99	REV. A
--	---	--	--------------------	-----------------	-------------------	-----------	-----------------	-----------

UNCONTROLLED COPY



**TABLE II — CONNECTOR CODE 36  
 MIL-C-38999, SERIES I & II**

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	øC MAX.	D MAX.	E MAX. ⚠4	F MAX.	G MAX. ⚠4	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	SER. II	SER. I								
0 8	8	9	.438-28	.813	.71	1.15	.91	1.28	0 4	0 5
1 0	10	11	.562-24	.938	.74	1.17	1.03	1.34	0 6	0 8
1 2	12	13	.688-24	1.125	.76	1.20	1.16	1.41	0 8	1 0
1 4	14	15	.812-20	1.250	.79	1.23	1.28	1.47	1 0	1 2
1 6	16	17	.938-20	1.375	.82	1.25	1.41	1.53	1 2	1 6
1 8	18	19	1.062-18	1.500	.83	1.26	1.47	1.59	1 3	1 6
2 0	20	21	1.188-18	1.625	.86	1.29	1.59	1.66	1 5	1 8
2 2	22	23	1.312-18	1.750	.88	1.32	1.72	1.72	1 7	2 0
2 4	24	25	1.438-18	1.875	.91	1.34	1.84	1.78	1 9	2 0


NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- ⚠3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- ⚠4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- ⚠5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- ⚠11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- ⚠13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- ⚠14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- ⚠15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- ⚠16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-36	DR RGW 10-22-90	CHK GF 10-26-90	APP GJG 10-26-92	REV. C
--	---	---	--------------------	-----------------	--------------------	--------------------	---------------------	-----------



**TABLE II — CONNECTOR CODE 38  
 MIL-C-38999, SERIES III & IV**

ORDER NO.	SHELL SIZE		A METRIC THD. CLASS 6H	ØC MAX.	D MAX.	E MAX. △4	F MAX.	G MAX. △4	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	SER.	SER.								
0 8	9	A	M12 x 1.0	.813	.71	1.15	.91	1.28	0 4	0 5
1 0	11	B	M15 x 1.0	.938	.74	1.17	1.03	1.34	0 6	0 8
1 2	13	C	M18 x 1.0	1.125	.76	1.20	1.16	1.41	0 8	1 0
1 4	15	D	M22 x 1.0	1.250	.79	1.23	1.28	1.47	1 0	1 2
1 6	17	E	M25 x 1.0	1.375	.82	1.25	1.41	1.53	1 2	1 6
1 8	19	F	M28 x 1.0	1.500	.83	1.26	1.47	1.59	1 3	1 6
2 0	21	G	M31 x 1.0	1.625	.86	1.29	1.59	1.66	1 5	1 8
2 2	23	H	M34 x 1.0	1.750	.88	1.32	1.72	1.72	1 7	2 0
2 4	25	J	M37 x 1.0	1.875	.91	1.34	1.84	1.78	1 9	2 0

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
 O’RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-36	DR RGW 10-22-90	CHK GF 10-26-90	APP GJG 10-26-92	REV. C
--	---	---	--------------------	-----------------	--------------------	--------------------	---------------------	-----------

UNCONTROLLED COPY





**TABLE II — CONNECTOR CODE 40  
 MIL-C-38999, SERIES III & IV**

ORDER NO.	SHELL SIZE		A METRIC THD. CLASS 6H	øC MAX.	D MAX.	E MAX. △4	F MAX.	G MAX. △4	øH ±.031	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	COM'L.	MIL.									
0 8	9	A	M12 x 1.0	.703	.52	1.15	.84	1.28	.625	0 4	0 5
1 0	11	B	M15 x 1.0	.827	.54	1.17	.97	1.34	.750	0 6	0 8
1 2	13	C	M18 x 1.0	.953	.57	1.20	1.09	1.41	.875	0 8	1 0
1 4	15	D	M22 x 1.0	1.077	.59	1.23	1.22	1.47	1.000	1 0	1 2
1 6	17	E	M25 x 1.0	1.203	.62	1.25	1.34	1.53	1.125	1 2	1 6
1 8	19	F	M28 x 1.0	1.327	.63	1.26	1.41	1.59	1.250	1 3	1 6
2 0	21	G	M31 x 1.0	1.453	.66	1.29	1.53	1.66	1.375	1 5	1 8
2 2	23	H	M34 x 1.0	1.577	.68	1.32	1.66	1.72	1.500	1 7	2 0
2 4	25	J	M37 x 1.0	1.703	.71	1.34	1.78	1.78	1.625	1 9	2 0

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2°	CAGE CODE 31461	0\CAT\4\ 217-40	DR RGW 11-15-89	CHK GF 11-20-89	APP GF 11-20-89	REV. F
--	---	---	--------------------	--------------------	--------------------	--------------------	--------------------	-----------

UNCONTROLLED COPY



**TABLE II — CONNECTOR CODE 41  
 MIL-C-38999, SERIES I & II**

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	C MAX. DIA.	D MAX.	E MAX. △	F MAX.	G MAX. △	H MAX. DIA.	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	SER. II	SER. I									
0 8	8	9	.438-28	.703	.52	1.15	.84	1.28	.813	0 4	0 5
1 0	10	11	.562-24	.827	.54	1.17	.97	1.34	.938	0 6	0 8
1 2	12	13	.688-24	.953	.57	1.20	1.09	1.41	1.125	0 8	1 0
1 4	14	15	.812-20	1.077	.59	1.23	1.22	1.47	1.250	1 0	1 2
1 6	16	17	.938-20	1.203	.62	1.25	1.34	1.53	1.375	1 2	1 6
1 8	18	19	1.062-18	1.327	.63	1.26	1.41	1.59	1.500	1 3	1 6
2 0	20	21	1.188-18	1.453	.66	1.29	1.53	1.66	1.625	1 5	1 8
2 2	22	23	1.312-18	1.577	.68	1.32	1.66	1.72	1.750	1 7	2 0
2 4	24	25	1.438-18	1.703	.71	1.34	1.78	1.78	1.875	1 9	2 0

**NOTES:**

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O’RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
- △17 FOR CODES 36 AND 38 SELF-LOCKING HEX COUPLING IS STANDARD. "H" MOD. IS SELF-LOCKING SQUARE COUPLING.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2°	CAGE CODE 31461	0\CAT\4\ 217-41	DR RGW 11-15-91	CHK GF 11-20-91	APP	REV. F
--	---	--	--------------------	--------------------	--------------------	--------------------	-----	-----------

UNCONTROLLED COPY



TABLE II — CONNECTOR CODE 51  
 MIL-C-26500, ALUMINUM

ORDER NO.	SHELL SIZE	<i>A</i> UNIFIED THD. CLASS 2B	$\phi C$ MAX.	<i>D</i> MAX.	<i>E</i> MAX. $\triangle 4$	<i>F</i> MAX.	$\phi H$ $\pm .031$	<i>G</i> MAX. $\triangle 4$	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
0 8	8	.438-28	.703	.62	1.15	1.00	.562	1.28	0 4	0 5
1 0	10	.562-24	.827	.64	1.17	1.06	.688	1.34	0 6	0 8
1 2	12	.750-20	1.010	.67	1.20	1.19	.875	1.41	0 8	1 0
1 4	14	.812-20	1.077	.72	1.23	1.31	.938	1.47	1 0	1 2
1 6	16	.938-20	1.203	.72	1.25	1.44	1.062	1.53	1 2	1 6
1 8	18	1.062-18	1.327	.76	1.26	1.56	1.188	1.59	1 3	1 6
2 0	20	1.188-18	1.453	.78	1.29	1.69	1.312	1.66	1 5	1 8
2 2	22	1.312-18	1.577	.79	1.32	1.81	1.438	1.72	1 7	2 0
2 4	24	1.438-18	1.703	.82	1.34	1.94	1.562	1.78	1 9	2 0

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O’RING — SILICONE
- $\triangle 3$  "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- $\triangle 4$  DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- $\triangle 5$  FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- $\triangle 11$  PROVIDED ON CONNECTOR CODES 18, 21 & 51 ONLY
- $\triangle 13$  NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- $\triangle 14$  FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- $\triangle 15$  FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- $\triangle 16$  FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = $\pm .06$ .XXX = $\pm .03$ ANGLES = $\pm 2'$	CAGE CODE 31461	SALES 217-51	DR 9-25-97	KP	CHK GF	APP 9-25-97	REV. A
--	---	---	--------------------	-----------------	---------------	----	-----------	----------------	-----------

UNCONTROLLED COPY



TABLE II - CONNECTOR CODE 54

MIL-C-26482, SERIES 2  
MIL-C-5015G, 3400 SERIES  
MIL-C-81703, SERIES 3  
MIL-C-83723, SERIES I & III  
NAS1599

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	C MAX. DIA.	D MAX.	E MAX. 4/6	F MAX.	G MAX. 4/6	H MAX. DIA.	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	8	7									
0 3	3	-	.562-24	.669	.55	1.15	.84	1.28	.880	0 4	0 5
0 8	-	8,8S	.500-20	.617	.55	1.15	.84	1.28	.880	0 4	0 5
1 0	-	10,10S,10SL	.625-24	.734	.57	1.17	.97	1.31	.942	0 6	0 7
1 2	7	12,12S	.750-20	.858	.60	1.20	1.09	1.38	1.068	0 8	1 0
1 4	12	14,14S	.875-20	.984	.61	1.21	1.16	1.44	1.192	0 8	1 0
1 6	19	16,16S	1.000-20	1.112	.64	1.24	1.28	1.50	1.318	1 0	1 2
1 8	27	18	1.062-18	1.218	.65	1.25	1.34	1.53	1.380	1 2	1 6
2 0	37	20	1.188-18	1.345	.68	1.28	1.47	1.59	1.505	1 4	1 8
2 2	-	22	1.312-18	1.468	.70	1.30	1.59	1.66	1.630	1 6	2 0
2 4	-	24	1.438-18	1.593	.73	1.33	1.72	1.72	1.755	1 8	2 0
2 8	-	28	1.750-18	1.969	.78	1.38	1.97	1.88	2.068	2 0	2 4
3 2	-	32	2.000-18	2.219	.83	1.43	2.22	2.00	2.318	2 4	2 4
3 6	-	36	2.250-16	2.469	.86	1.46	2.34	2.13	2.568	2 4	2 4
4 0	-	40	2.500-16	2.719	.91	1.51	2.59	2.25	2.818	2 4	2 4
4 4	-	44	2.750-16	2.969	.96	1.56	2.84	2.38	3.068	2 4	2 4
4 8	-	48	3.000-16	3.219	1.01	1.61	3.09	2.50	3.318	2 4	2 4
6 1	61	-	1.500-18	1.653	.74	1.34	1.78	1.75	1.818	1 8	2 0

NOTES:

- 1. ASSEMBLY IDENT. PER MIL-STD-130.
- 2. MATERIAL: COMPONENTS - ALUM. ALLOY  
O-RING - SILICONE

- 3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- 4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- 5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- 6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- 7 SIZES PER MIL-C-5015 (3400 SERIES), MIL-C-26482 (SERIES 2), MIL-C-83723 (SERIES I & III), & NAS1599.

- 8 SIZES PER MIL-C-81703, SERIES 3.
- 11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- 13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- 14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- 15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- 16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
- 17 FOR CODES 36 AND 38 SELF-LOCKING HEX COUPLING IS STANDARD. "H" MOD. IS SELF-LOCKING SQUARE COUPLING.

\*THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2°	CAGE CODE 31461	O\CAT\4\ 217-54	DR TW 12-05-89	CHK GF 12-07-89	APP	REV. F
--	---	--	--------------------	--------------------	-------------------	--------------------	-----	-----------

UNCONTROLLED COPY




TABLE II — CONNECTOR CODE 55

MIL-C-26482, SERIES 1  
 MIL-C-5015G, 3400 SERIES  
 MIL-C-81703, SERIES 3  
 MIL-C-83723, SERIES I & III  
 NAS1599

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	øC MAX.	D MAX.	E MAX. ④⑥	F MAX.	G MAX. ④⑥	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	⑧	⑦								
0 8	—	8,8S	.500-20	.703	.61	1.15	.90	1.28	0 4	0 5
1 0	—	10,10S,10SL	.625-24	.809	.63	1.17	1.03	1.31	0 6	0 8
1 2	7	12,12S	.750-20	.929	.66	1.20	1.15	1.38	0 8	1 0
1 4	12	14,14S	.875-20	1.059	.67	1.21	1.22	1.44	0 9	1 0
1 6	19	16,16S	1.000-20	1.187	.70	1.24	1.34	1.50	1 1	1 2
1 8	27	18	1.062-18	1.293	.71	1.25	1.40	1.53	1 2	1 6
2 0	37	20	1.188-18	1.420	.74	1.28	1.53	1.59	1 4	1 8
2 2	—	22	1.312-18	1.543	.76	1.30	1.65	1.66	1 6	2 0
2 4	—	24	1.438-18	1.668	.79	1.33	1.78	1.72	1 8	2 0
2 8	—	28	1.750-18	2.015	.84	1.38	2.03	1.88	2 2	2 4

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O’RING — SILICONE
- ③ "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- ④ DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- ⑤ FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- ⑥ FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- ⑦ SIZES PER MIL-C-5015 (3400 SERIES), MIL-C-26482 (SERIES 2), MIL-C-83723 (SERIES I & III), & NAS1599.
- ⑧ SIZES PER MIL-C-81703, SERIES 3.
- ⑪ PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- ⑬ NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- ⑭ FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- ⑮ FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- ⑯ FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-55	DR 02-04-91	RGW	CHK 02-05-91	GF	APP 10-26-92	GJG	REV. B
--	---	---	--------------------	-----------------	----------------	-----	-----------------	----	-----------------	-----	-----------

UNCONTROLLED COPY




TABLE II — CONNECTOR CODE 61  
 MIL-C-81511, SERIES 1, 2, 3, & 4

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	ØC MAX.	D MAX.	E MAX. ⚠4	F MAX.	G MAX. ⚠4⚠6	ØH ±.031	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	COM'L.	MIL.									
0 8	8	A	.500-28	.765	.76	1.17	1.25	1.28	.625	0 6	0 8
1 0	10	B	.625-28	.890	.79	1.20	1.38	1.34	.750	0 8	1 0
1 4	14	D	.875-28	1.140	.84	1.25	1.63	1.47	1.000	1 2	1 6
1 6	16	E	1.000-28	1.265	.86	1.28	1.75	1.53	1.125	1 4	1 8
1 8	18	F	1.125-28	1.390	.89	1.30	1.88	1.59	1.250	1 6	2 0
2 0	20	G	1.250-28	1.515	.92	1.33	2.00	1.66	1.375	1 8	2 0
2 2	22	H	1.375-28	1.640	.94	1.35	2.13	1.72	1.500	2 0	2 4
2 4	24	J	1.500-28	1.765	.97	1.38	2.25	1.78	1.625	2 2	2 4

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- ⚠3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- ⚠4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- ⚠5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- ⚠6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- ⚠11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- ⚠13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- ⚠14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- ⚠15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- ⚠16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-61	DR TW 02-07-90	CHK GF 02-08-90	APP GIG 10-26-92	REV. C
--	---	---	--------------------	-----------------	-------------------	--------------------	---------------------	-----------

UNCONTROLLED COPY




TABLE II — CONNECTOR CODE 64  
 LITTON VEAM CIR SERIES

ORDER NO.	SHELL SIZE	A UNIFIED THD. CLASS 2B	ØC MAX.	D MAX.	E MAX. △4	F MAX.	G MAX. △4△6	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
1 2	12	.625-24	.890	.82	1.17	1.19	1.31	0 6	0 8
1 4	14	.750-20	.953	.83	1.18	1.25	1.38	0 7	0 9
1 6	16	.875-20	1.140	.85	1.20	1.31	1.44	0 8	1 0
1 8	18	1.000-20	1.265	.90	1.25	1.56	1.50	1 2	1 6
2 0	20	1.125-18	1.390	.90	1.25	1.56	1.56	1 2	1 6
2 2	22	1.250-18	1.515	.91	1.26	1.63	1.63	1 3	1 6
2 4	24	1.375-18	1.640	.96	1.32	1.87	1.69	1 7	2 0
2 8	28	1.625-18	1.890	.99	1.34	2.00	1.81	1 9	2 0
3 2	32	1.875-16	2.140	1.04	1.39	2.25	1.94	2 3	2 4
3 6	36	2.062-16	2.327	1.11	1.46	2.56	2.06	2 4	2 4
4 0	40	2.312-16	2.577	1.16	1.51	2.81	2.19	2 4	2 4

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.
- △11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- △13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- △14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- △15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- △16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-64	DR 01-28-92	RGW	CHK GJG	APP 10-27-92	REV. B
--	---	---	--------------------	-----------------	----------------	-----	------------	-----------------	-----------




TABLE II — CONNECTOR CODE 68  
 MIL-C-38999, SERIES III & IV

ORDER NO.	SHELL SIZE		A METRIC THD. CLASS 6H	ØC MAX.	D MAX.	E MAX. ⚠4	F MAX.	G MAX. ⚠4	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
	COM'L.	MIL.								
0 8	9	A	M12 x 1.0	.703	.52	1.15	.84	1.28	0 4	0 5
1 0	11	B	M15 x 1.0	.827	.54	1.17	.97	1.34	0 6	0 8
1 2	13	C	M18 x 1.0	.953	.57	1.20	1.09	1.41	0 8	1 0
1 4	15	D	M22 x 1.0	1.077	.59	1.23	1.22	1.47	1 0	1 2
1 6	17	E	M25 x 1.0	1.203	.62	1.25	1.34	1.53	1 2	1 6
1 8	19	F	M28 x 1.0	1.327	.63	1.26	1.41	1.59	1 3	1 6
2 0	21	G	M31 x 1.0	1.453	.66	1.29	1.53	1.66	1 5	1 8
2 2	23	H	M34 x 1.0	1.577	.68	1.32	1.66	1.72	1 7	2 0
2 4	25	J	M37 x 1.0	1.703	.71	1.34	1.78	1.78	1 9	2 0

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-130.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O-RING — SILICONE
- ⚠3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- ⚠4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- ⚠5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- ⚠11 PROVIDED ON CONNECTOR CODES 18 AND 21 ONLY.
- ⚠13 NOT PROVIDED ON CONNECTOR CODES 36, 38, 54, & 55.
- ⚠14 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 36.
- ⚠15 FOR SHROUD INSTEAD OF O-RING USE CONNECTOR CODE 38.
- ⚠16 FOR THRU TEETH AND SHROUD USE CONNECTOR CODE 55.
- 18 CODE 68 ROUND SELF-LOCKING COUPLING I.A.W. MIL-C-85049

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MATERIAL AND FINISH PER NOTES DO NOT SCALE DRAWING	TOLERANCES: .XX = ± .06 .XXX = ± .03 ANGLES = ± 2'	CAGE CODE 31461	SALES 217-68	DR ATP 5-19-98	CHK GF 5-19-98	APP GF 05-19-98	REV. A
--	---	---	--------------------	-----------------	-------------------	-------------------	--------------------	-----------

UNCONTROLLED COPY



TABLE I ~ CONNECTOR INTERFACE DATA

ORDER NUMBER	SHELL SIZE		A R. H. THREAD CLASS 2A	B MAX. O.D.	C ±.09
	STK, RTK	DM, DS ETC.			
08	8		.375 - 32 UNEF	.729	.66
03	10	3	.500 - 28 UNEF	.864	.69
07		7	.625 - 24 UNEF	.989	.71
12	14	12	.750 - 20 UNEF	1.114	.74
19	16	19	.875 - 20 UNEF	1.208	.75
27	18	27	1.000 - 20 UNEF	1.458	.80
37		37	1.188 - 18 UNEF	1.582	.83
61		61	1.500 - 18 UNEF	1.958	.88

TABLE II ~ CABLE ENTRY DATA


ENTRY SIZE	W DIA.	X DIA.	Y DIA.	Z ±.020
04	.500	.334	.375	.250
05	.562	.396	.438	.312
06	.625	.459	.500	.375
07	.688	.521	.562	.438
08	.750	.584	.625	.500
09	.812	.646	.688	.562
10	.875	.709	.750	.625
11	.938	.771	.812	.688
12	1.000	.834	.875	.750
13	1.062	.896	.938	.812
14	1.125	.959	1.000	.875

UNCONTROLLED COPY


D ±.094 △ 5	E ±.094	F ±.094 △ 5	AVAILABLE ENTRY SIZES
1.116	.875	1.281	04
1.142	1.062	1.344	04 THRU 06
1.168	1.125	1.406	04 THRU 08
1.194	1.250	1.469	04 THRU 10
1.207	1.312	1.500	04 THRU 12
1.259	1.562	1.625	04 THRU 14
1.285	1.688	1.688	04 THRU 16
.350	1.938	1.844	04 THRU 20

A THREAD  
(TYP.)


UNCONTROLLED COPY

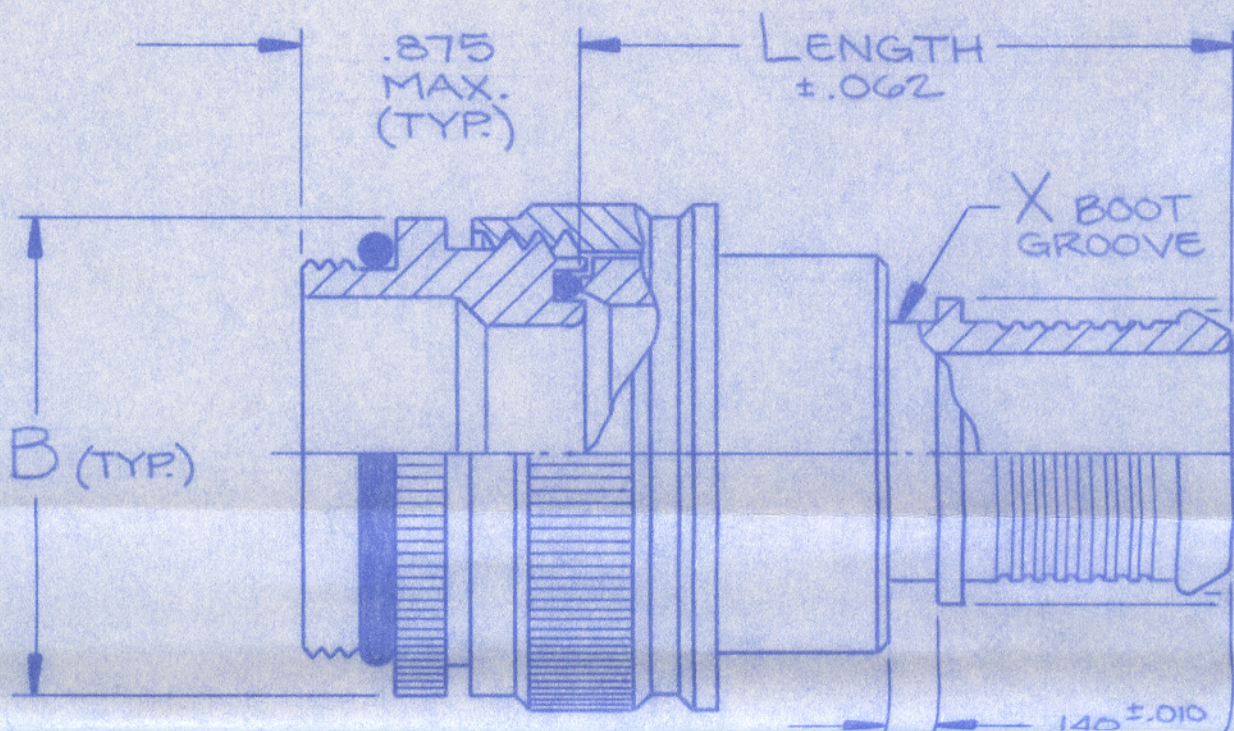


UNCONTROLLED COPY

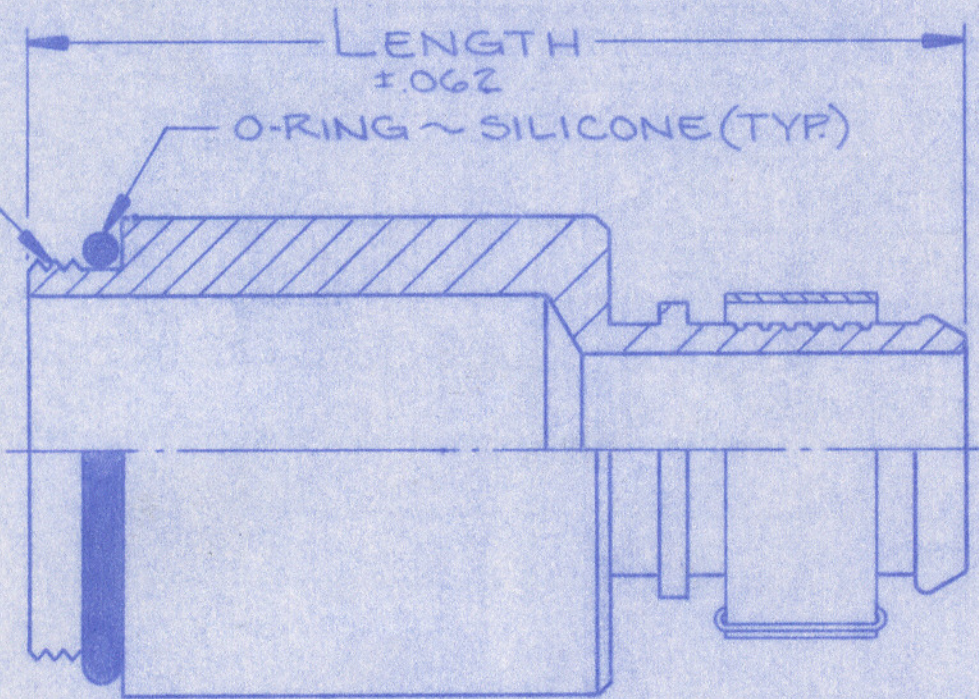

STYLE B

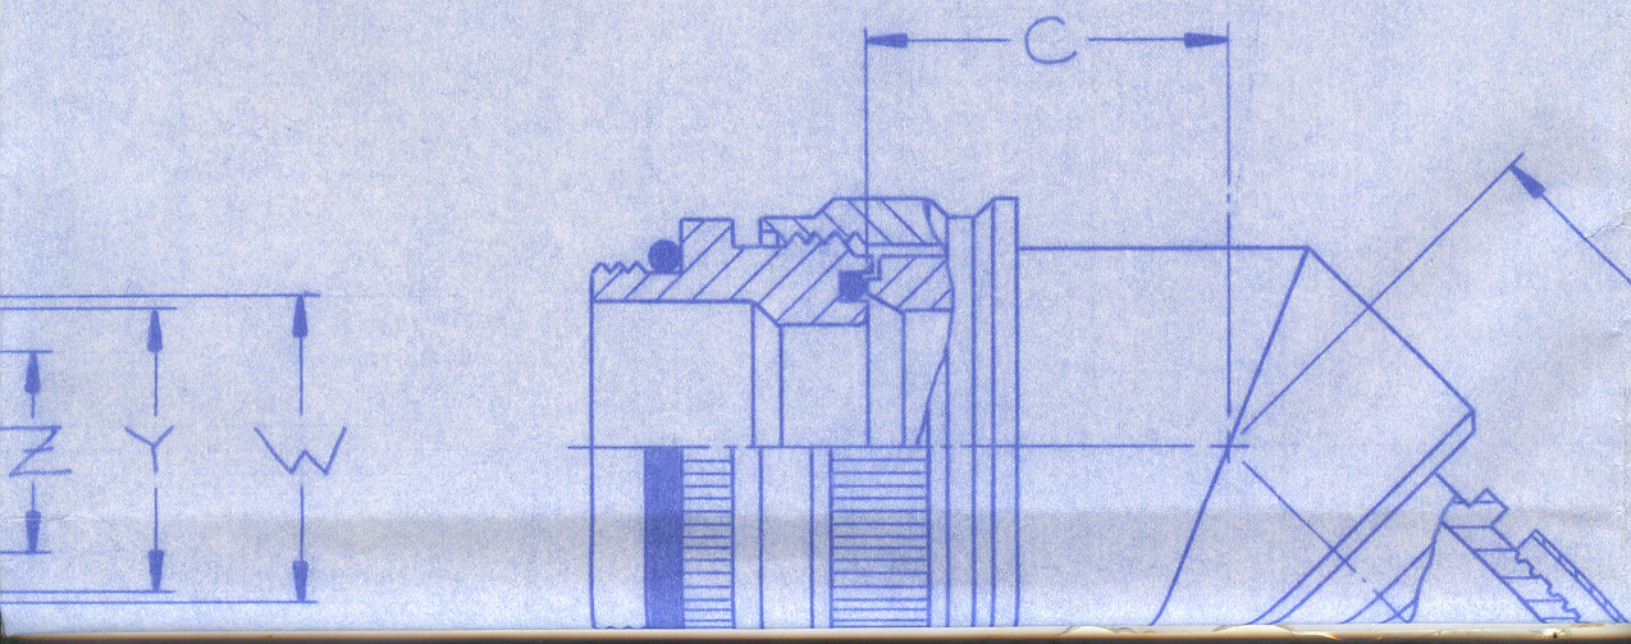

L/A	DESCRIPTION	DATE	APPROVED
A	REVISED PER ECO # 17384	TDW 1-12-90	G-90

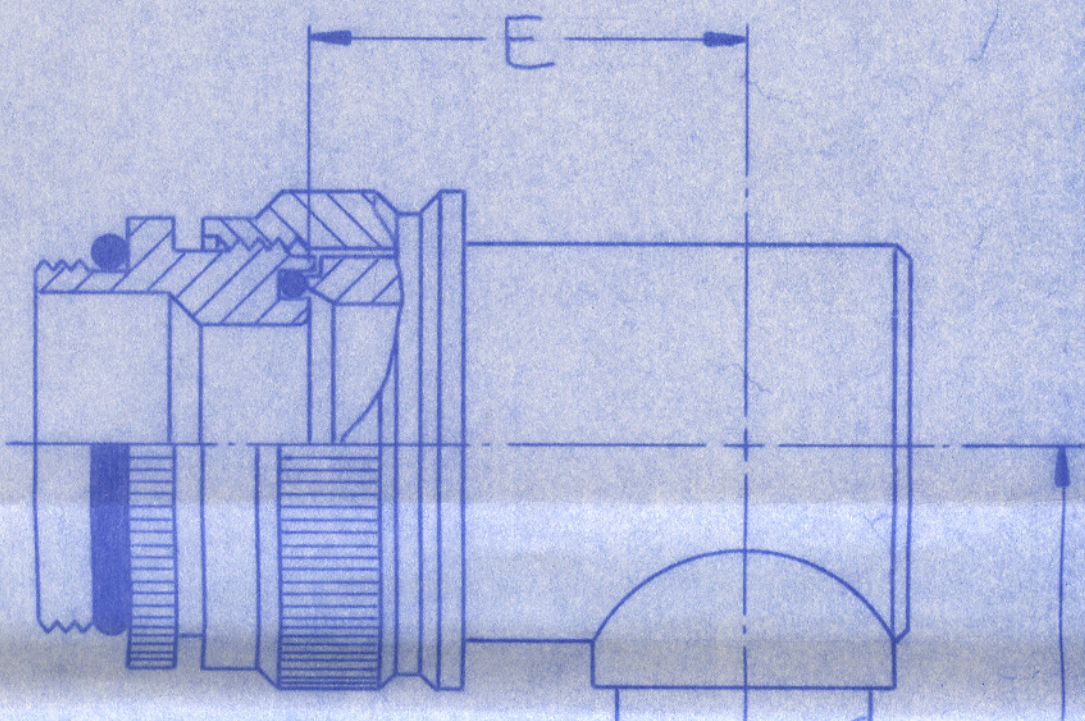

UNCONTROLLED COPY

12	1.000	.834	.875	.750
13	1.062	.896	.938	.812
14	1.125	.959	1.000	.875
15	1.188	1.021	1.062	.938
16	1.250	1.084	1.125	1.000
17	1.312	1.146	1.188	1.062
18	1.375	1.209	1.250	1.125
19	1.438	1.271	1.312	1.188
20	1.500	1.334	1.375	1.250

EXAM  
21771

ADAPTER SERIES  
SPIN COUPLING, EMI /RFI


CONNECTOR CODE  
MIL-C-81703 SERIES 1 & 2

ADAPTER SERIES  
STYLE B ~ BASIC ADAPTER  
STYLE S ~ STRAIGHT ADAPTER  
STYLE A ~ 45° ADAPTER  
STYLE R ~ 90° ADAPTER

CONNECTOR ORDER NUMBER ~ TABLE

ENTRY ORDER NUMBER ~ TABLE

B (TYP.)

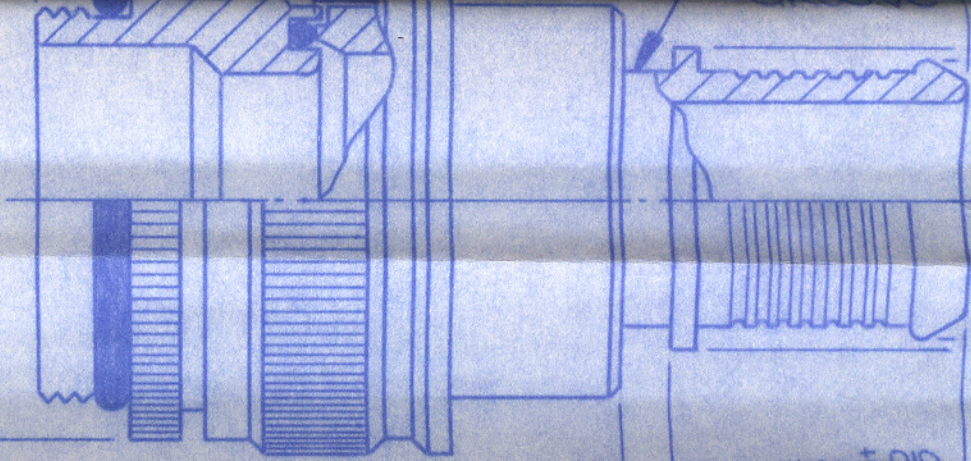

.140 ± .010 (TYP.)

.764 REF.  $\triangle 4$   $\triangle 5$  (TYP.)

### STYLE S

EMI BAND NOT SHOWN

UNCONTROLLED COPY

PART NUMBER  
S 271210855  $\triangle 4$

PLATING CODE NUMBER

03 ~ CADMIUM, OLIVE DRAB, PER QQ-

51 ~ ELECTROLESS NICKEL PER MIL-C-

55 ~ CADMIUM, OLIVE DRAB, PER QQ-P-

ELECTROLESS NICKEL PER MIL-C-2

LENGTH CODE NUMBER

LENGTH OF PART IS CHOSEN IN 1/4 INCH

(EXAMPLE: LENGTH CODE 06 = 1.500) (00 = MINIMUM LENGTH WITH BOOT GROOVE (STANDARD))

MINIMUM LENGTH WITHOUT BOOT GROOVE (MODIFIED)

TERMINATION OPTIONS  $\triangle 3$

1 ~ ADAPTER ONLY

2 ~ ADAPTER w/ 3/8" EMI BAND



3 ~ ADAPTER w/ 3/8" EMI BAND AND SHRIMP

4 ~ ADAPTER w/ 1/4" EMI BAND

5 ~ ADAPTER w/ 1/4" EMI BAND AND SHRIMP

I

II

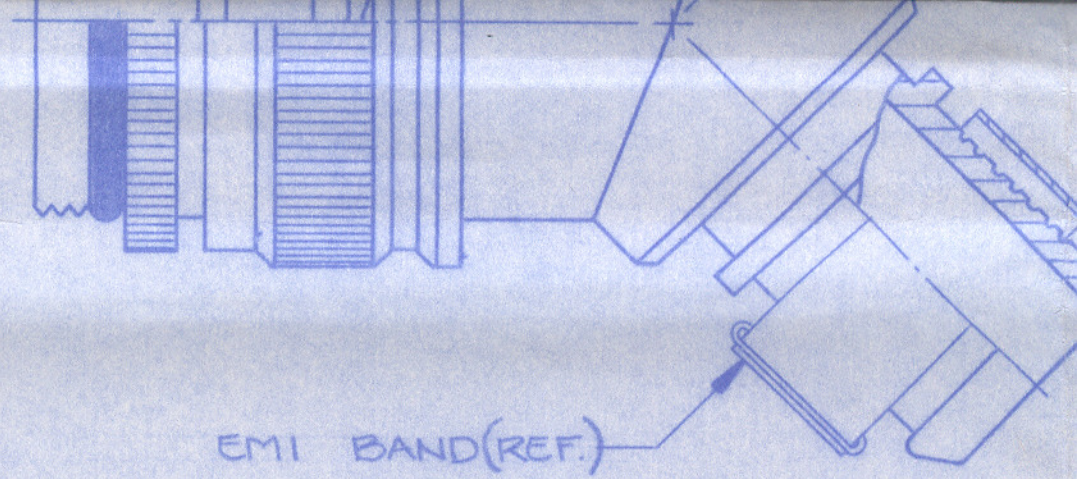

EMI BAND (REF.)

STYLE A

- ⑥ INSERT A FOR DEUT  
INSERT B FOR DEUT  
INSERT C FOR DEU  
OMIT FOR DEUTSCH
- ⑤ DIMENSIONS INDICATE  
WITH MOD CODE Z
- ④ ADD Z FOR LESS
- ③ CONSULT FACTORY

2. MATERIAL: ADAPTE  
RETAINI  
SHRINK

1. ASSEMBLY IDENT

NOTES:


IG, TYPE II, CLASS 3  
074, CLASS 3 OR 4, GRADE B  
TYPE II, CLASS 3 OVER  
4, CLASS 3 OR 4, GRADE B

INCREMENTS  
R STYLES A & R)  
RD) = 1.500 (LENGTH CODE 06)  
Z (A) = 1.250 (LENGTH CODE 05)

K SLEEVE  
K SLEEVE

ITEM NO.	NOMENCLATURE
<p>The information disclosed herein is the property of, and a proprietary item originated by ELECTRO ADAPTER, INC., who reserves all patent, proprietary design, use, sale, manufacturing and reproduction rights thereto; except for uses expressly granted to the United States Government and items which are vendor parts, disclosure shall not be made without written consent from ELECTRO ADAPTER, INC.</p>	
<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</p>	
<p>TOLERANCES</p>	
<p>DECIMALS XX ± .06    XXX ± .031</p>	<p>ANGLES ± 2°</p>
<p>DO NOT SCALE DRAWING</p>	

UNCONTROLLED COPY

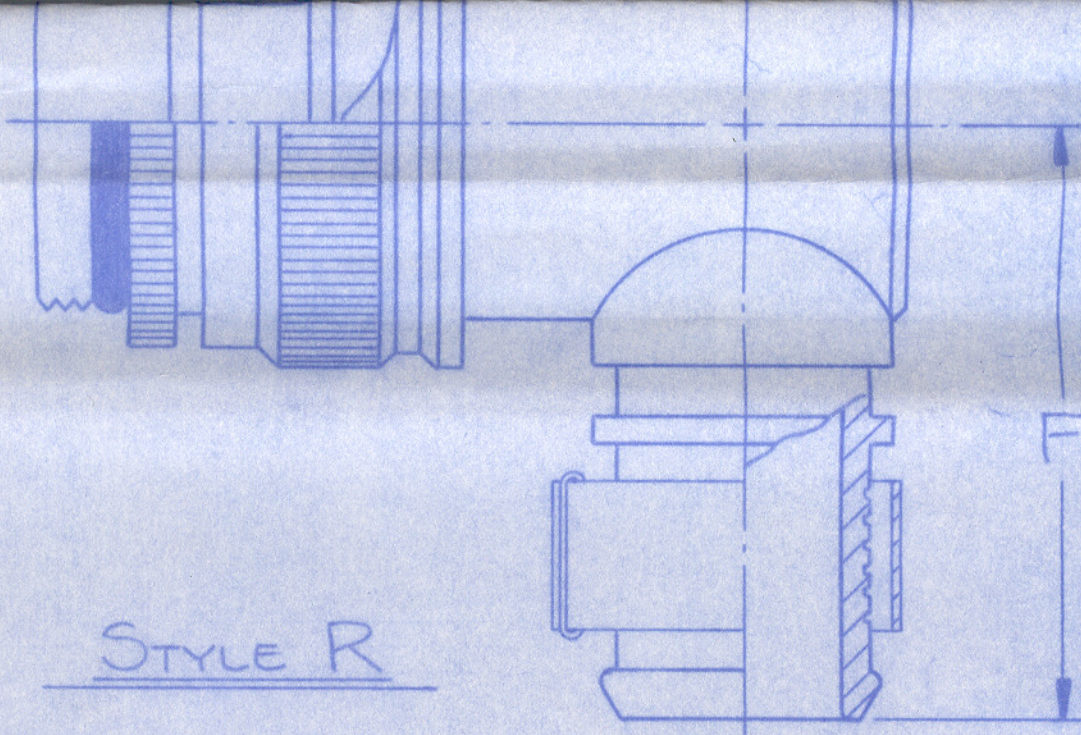

STYLE R

UTSCH DM CONNECTORS.  
 UTSCH DSM, RSM, & SMK CONNECTORS.  
 UTSCH RTK & STK CONNECTORS.  
 DA, DS, DD, MDR & MDS CONNECTORS.  
 PD WILL BE .202 INCH LESS WHEN ORDERED



BOOT GROOVE, OMIT FOR STANDARD BOOT GROOVE.  
 FOR OPTIONAL SHIELD ACCOMMODATIONS.  
 R COMPONENTS ~ ALUMINUM ALLOY  
 NG RING AND EMI BAND ~ STAINLESS STEEL  
 SLEEVE ~ POLYOLEFIN, O-RING ~ SILICONE  
 TIFICATION PER MIL-STD-130.

IDENTIFYING NO.	MATERIAL	SPECIFICATION	QTY
-----------------	----------	---------------	-----

LIST OF MATERIALS

TITLE	SIGNATURE	DATE
DFTSMN	RGW	12-6 89
DSGN	GF	12-7 89
CHKR	GF	12-7 89
APVD	[Signature]	12-7 89
RELEASED		12-7-89 DATE



**ELECTRO ADAPTER, INC.**  
 CHATSWORTH, CA 91311-6189

DRAWING TITLE  
 ADAPTER, EMI/RFI,  
 SPIN COUPLING, FOR MIL-C-81703  
 SERIES I & II CONNECTORS

SIZE	CODE IDENT NO.	DRAWING NUMBER	REV
D	31461	21771	A
SCALE	NONE	FILE NO.	SHEET 1 OF

UNCONTROLLED COPY





TABLE II — CONNECTOR CODE 76  
 PATT 105, 603 & 608


ORDER NO.	SHELL SIZE	<i>A</i> UNIFIED THD. CLASS 2B	<i>C</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX. △4	<i>F</i> MAX.	<i>G</i> MAX. △4 △6	BAND MAX. 1 PIECE ENTRY	MOD. C MAX. 1 PIECE ENTRY
0 8	8	.438-28	.703	.62	1.16	1.00	1.28	0 4	0 5
1 0	10	.562-24	.827	.63	1.17	1.06	1.34	0 7	1 0
1 2	12	.688-24	.953	.66	1.20	1.19	1.41	0 8	0 9
1 4	14	.812-20	1.077	.69	1.23	1.31	1.47	1 0	1 0
1 6	16	.938-20	1.203	.71	1.25	1.44	1.53	1 2	1 2
1 8	18	1.062-18	1.327	.74	1.28	1.56	1.59	1 4	1 6
2 0	20	1.188-18	1.453	.76	1.30	1.69	1.66	1 6	1 8
2 2	22	1.312-18	1.577	.79	1.33	1.81	1.72	1 8	2 0
2 4	24	1.438-18	1.703	.82	1.36	1.94	1.78	2 0	2 0

NOTES:

1. ASSEMBLY IDENT. PER MIL-STD-1285.
2. MATERIAL: COMPONENTS — ALUM. ALLOY  
O'RING — SILICONE
- △3 "2 PIECE" CONFIG. SUPPLIED WHEN CABLE ENTRY DIA. EXCEEDS CONN. INSERT DIA..
- △4 DIMENSIONS INDICATED WILL BE .20" LESS WHEN ORDERED WITH MOD. CODE Z.
- △5 FOR MULTIPLE MOD. CODES USE SEQUENCE SHOWN.
- △6 FOR MODIFICATION C AND ENTRY 24, ADD .188" TO LENGTH SHOWN.

\* THIS DOCUMENT INCOMPLETE WITHOUT "ENTRY SPECIFICATION SHEET".

UNCONTROLLED COPY

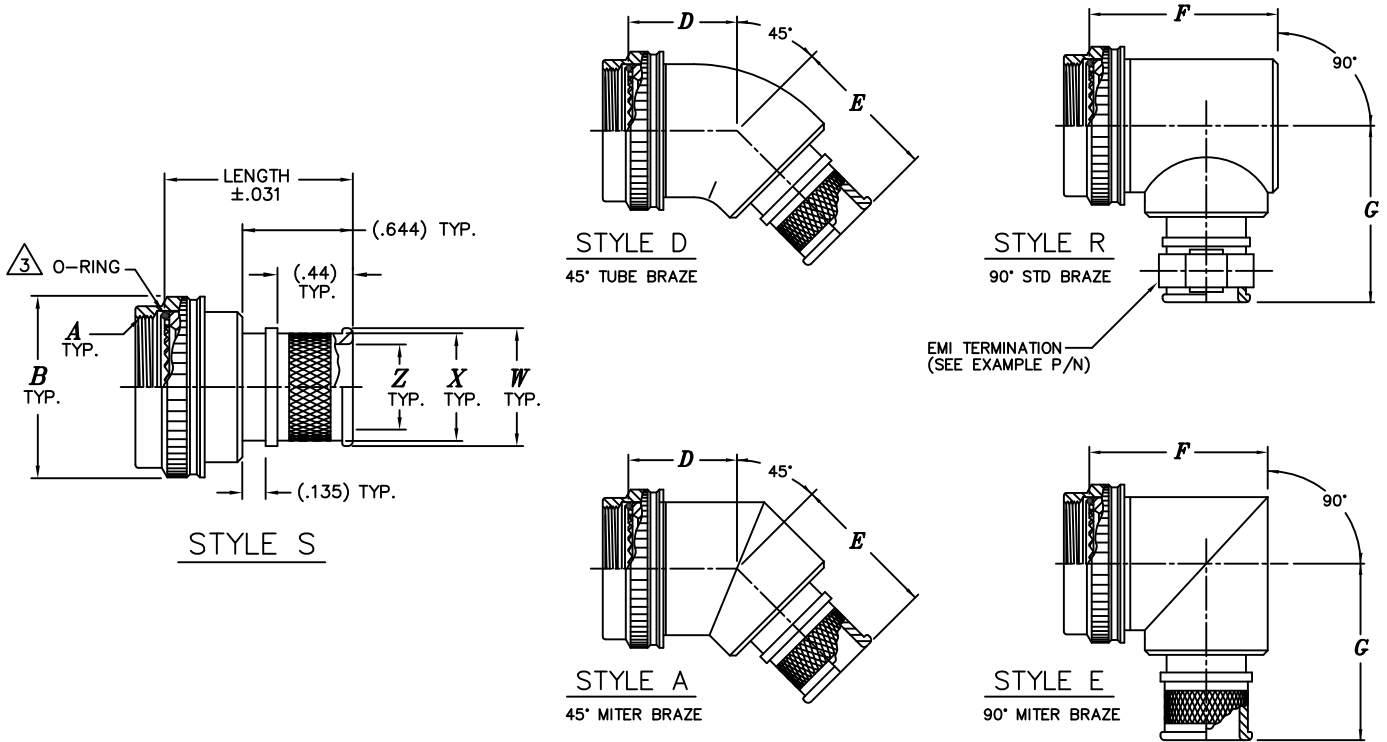

*Example Part Number*

271 41 S 16 10 10 8 5 5 S

BASIC ADAPTER NUMBER

STYLE  
 S = STRAIGHT  
 A = 45°  
 R = 90°

ORDER NO. PER TABLE II

ADD 'S' FOR SELF-LOCKING COUPLING

PLATING CODE NUMBER  
 13 = ZINC COLBALT, OLIVE DRAB, PER ASTM B840-99  
 55 = CADMIUM, OLIVE DRAB, PER SAE AMS-QQ-P-416, TYPE II, CLASS 3, OVER ELECTROLESS NICKEL PER AMS-C-26074, CLASS 3 OR 4, GRADE B  
 10 = PASSIVATE, PER SAE AMS-QQ-P-35 (MATERIAL=SST)  
 FOR ADDITIONAL FINISH OPTIONS, SEE CATALOG TABLE 4.

MILITARY SPECIFICATION	SERIES	CODE NO.
MIL-DTL-5015	3100	18
MIL-DTL-26482	1	21
MIL-DTL-26482	I (07)	24
MIL-DTL-28840	-	30
MIL-DTL-38999	III & IV	40
MIL-DTL-38999	I & II	41
MIL-DTL-26482	2	54
MIL-DTL-5015	3400	54
MIL-C-81703	3	54
MIL-DTL-83723	I	54
MIL-DTL-83723	III	54
NAS1599	-	54
LITTON VEAM CIR	-	64
AB 05	DEF. STD. 59-35 PART 1, SEC. 3	76
PATT 121	DEF. STD. 59-35 PART 1, SEC. 8	78

ENTRY ORDER NO.	EMP BAND			BOOT P/N REF
	Z +.010 -.020 DIA.	X ±.015 DIA.	W ±.010 DIA.	
0 2	.125	.250	.312	N/A
0 3	.188	.312	.375	152-42-G-W24
0 4	.250	.375	.438	152-42-G-W24
0 5	.312	.438	.500	152-42-G-W24
0 6	.375	.500	.562	152-42-G-W24
0 7	.438	.562	.625	154-42-G-W24
0 8	.500	.625	.688	154-42-G-W24
0 9	.562	.688	.750	154-42-G-W24
1 0	.625	.750	.812	154-42-G-W24
1 2	.750	.875	.938	155-42-G-W24
1 3	.812	.937	1.000	156-42-G-W24
1 4	.875	1.000	1.062	156-42-G-W24
1 6	1.000	1.125	1.188	156-42-G-W24
1 7	1.062	1.188	1.250	157-43-G-W24
1 8	1.125	1.250	1.312	157-43-G-W24
1 9	1.188	1.313	1.375	157-43-G-W24
2 0	1.250	1.375	1.438	157-43-G-W24
2 2	1.375	1.500	1.562	158-43-G-W24
2 3	1.438	1.562	1.625	158-43-G-W24
2 4	1.500	1.625	1.688	158-43-G-W24


MIN. AVAIL. LENGTH	CONNECTOR CODES (TABLE I)
1.000	40, 41, 54,
1.250	18, 21, 24, 76, 78
1.500	30, 64

1 = ADAPTER ONLY
4 = ADAPTER w/ 1/4" EMP BAND (REF. 214L0002)
5 = ADAPTER w/ 1/4" EMP BAND AND SHRINK BOOT (REF 214L0002)
6 = ADAPTER w/ 1/8" EMP BAND AND SHRINK BOOT (REF 214L0005)
7 = ADAPTER w/ 1/4" EMP BAND AND (REF 214L0006)
8 = ADAPTER w/ 1/8" EMP BAND (REF. 214L0005)
9 = ADAPTER w/ 1/4" EMP BAND AND SHRINK BOOT (REF 214L0006)

CONSULT FACTORY FOR TERMINATION NUMBER NOT SHOWN




**TABLE II – CONNECTOR CODE 21  
 MIL-C-26482, SERIES I**

ORDER NO.	SHELL SIZE	<i>A</i> UNIFIED THD. CLASS 2B	<i>B</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX.	<i>F</i> MAX.	<i>G</i> MAX.	
0 8	8	.438-28	.703	.62	1.15	1.00	1.38	0 4
1 0	10	.562-24	.827	.63	1.17	1.13	1.44	0 6
1 2	12	.688-24	.953	.66	1.20	1.25	1.50	0 8
1 4	14	.812-20	1.077	.69	1.23	1.38	1.56	1 0
1 6	16	.938-20	1.203	.71	1.25	1.50	1.63	1 2
1 8	18	1.062-18	1.327	.74	1.26	1.63	1.69	1 4
2 0	20	1.188-18	1.453	.76	1.29	1.75	1.75	1 6
2 2	22	1.312-18	1.577	.79	1.32	1.88	1.81	1 8
2 4	24	1.438-18	1.703	.82	1.34	2.00	1.88	2 0

NOTES: UNLESS OTHERWISE SPECIFIED

1. ASSEMBLY IDENT. PER MIL-STD-1285.
2. MATERIAL: COMPONENTS – ALUM. ALLOY OR SST  
 O’RING – SILICONE

 4. WHEN ENTRY SIZE EXCEEDS CONNECTOR INSERT DIAMETER  
 A STEP-UP CONFIGURATION WILL BE SUPPLIED.



**TABLE II – CONNECTOR CODE 40  
 MIL-C-38999, SERIES III & IV**

ORDER NO.	SHELL SIZE		<i>A</i> METRIC THD. CLASS 6H	<i>B</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX.	<i>F</i> MAX.	<i>G</i> MAX.	△ 4.
	COM'L.	MIL.							
0 8	9	A	M12 x 1.0	.703	.52	.997	.84	1.38	0 4
1 0	11	B	M15 x 1.0	.827	.54	1.023	.97	1.44	0 6
1 2	13	C	M18 x 1.0	.953	.57	1.048	1.09	1.50	0 8
1 4	15	D	M22 x 1.0	1.077	.59	1.074	1.22	1.56	1 0
1 6	17	E	M25 x 1.0	1.203	.62	1.100	1.34	1.63	1 2
1 8	19	F	M28 x 1.0	1.327	.63	1.113	1.41	1.69	1 4
2 0	21	G	M31 x 1.0	1.453	.66	1.152	1.53	1.75	1 6
2 2	23	H	M34 x 1.0	1.577	.68	1.178	1.66	1.81	1 8
2 4	25	J	M37 x 1.0	1.703	.71	1.204	1.78	1.88	2 0

NOTES: UNLESS OTHERWISE SPECIFIED

1. ASSEMBLY IDENT. PER MIL-STD-1285.
2. MATERIAL: COMPONENTS – ALUM. ALLOY OR SST  
 O’RING – SILICONE

△**4.** WHEN ENTRY SIZE EXCEEDS CONNECTOR INSERT DIAMETER  
 A STEP-UP CONFIGURATION WILL BE SUPPLIED. SEE SHEET 3



**TABLE II – CONNECTOR CODE 41  
 MIL-C-38999, SERIES I & II**

ORDER NO.	SHELL SIZE		<i>A</i> UNIFIED THD. CLASS 2B	<i>B</i> MAX. DIA.	<i>D</i> MAX.	<i>E</i> MAX.	<i>F</i> MAX.	<i>G</i> MAX.	△ 4.
	SER. II	SER. I							
0 8	8	9	.438-28	.703	.52	1.15	.84	1.38	0 4
1 0	10	11	.562-24	.827	.54	1.17	.97	1.44	0 6
1 2	12	13	.688-24	.953	.57	1.20	1.09	1.50	0 8
1 4	14	15	.812-20	1.077	.59	1.23	1.22	1.56	1 0
1 6	16	17	.938-20	1.203	.62	1.25	1.34	1.63	1 2
1 8	18	19	1.062-18	1.327	.63	1.26	1.41	1.69	1 4
2 0	20	21	1.188-18	1.453	.66	1.29	1.53	1.75	1 6
2 2	22	23	1.312-18	1.577	.68	1.32	1.66	1.81	1 8
2 4	24	25	1.438-18	1.703	.71	1.34	1.78	1.88	2 0

NOTES: UNLESS OTHERWISE SPECIFIED

1. ASSEMBLY IDENT. PER MIL-STD-1285.
2. MATERIAL: COMPONENTS – ALUM. ALLOY OR SST  
 O’RING – SILICONE

△  
4. WHEN ENTRY SIZE EXCEEDS CONNECTOR INSERT DIAMETER  
 A STEP-UP CONFIGURATION WILL BE SUPPLIED. SEE SHEET 3



**TABLE II – CONNECTOR CODE 54**

MIL-C-26482, SERIES 2  
 MIL-C-5015G, 3400 SERIES  
 MIL-C-81703, SERIES 3  
 MIL-C-83723, SERIES I & III  
 NAS1599

ORDER NO.	SHELL SIZE		A UNIFIED THD. CLASS 2B	B MAX. DIA.	D MAX.	E MAX.	F MAX.	G MAX.	△4.
	△6.	△5.							
0 3	3	—	.562-24	.669	.55	1.15	.84	1.38	0 4
0 8	—	8,8S	.500-20	.617	.55	1.15	.84	1.38	0 4
1 0	—	10,10S,10SL	.625-24	.734	.57	1.17	.97	1.44	0 6
1 2	7	12,12S	.750-20	.858	.60	1.20	1.09	1.50	0 8
1 4	12	14,14S	.875-20	.984	.61	1.21	1.22	1.56	0 9
1 6	19	16,16S	1.000-20	1.112	.64	1.24	1.34	1.63	1 2
1 8	27	18	1.062-18	1.218	.65	1.25	1.34	1.63	1 2
2 0	37	20	1.188-18	1.345	.68	1.28	1.47	1.69	1 4
2 2	—	22	1.312-18	1.468	.70	1.30	1.59	1.75	1 6
2 4	—	24	1.438-18	1.593	.73	1.33	1.72	1.81	1 8
2 8	—	28	1.750-18	1.969	.78	1.38	1.97	1.88	2 4
3 2	—	32	2.000-18	2.219	.83	1.43	2.22	2.00	2 4
3 6	—	36	2.250-16	2.469	.86	1.46	2.34	2.13	2 4
4 0	—	40	2.500-16	2.719	.91	1.51	2.59	2.25	2 4
4 4	—	44	2.750-16	2.969	.96	1.56	2.84	2.38	2 4
4 8	—	48	3.000-16	3.219	1.01	1.61	3.09	2.50	2 4
6 1	61	—	1.500-18	1.653	.74	1.34	1.78	1.88	1 9

NOTES: UNLESS OTHERWISE SPECIFIED

1. ASSEMBLY IDENT. PER MIL-STD-1285.
2. MATERIAL: COMPONENTS – ALUM. ALLOY OR SST

△3. O-RING NOT REQUIRED PER AS85049.

△4. WHEN ENTRY SIZE EXCEEDS CONNECTOR INSERT DIAMETER A STEP-UP CONFIGURATION WILL BE SUPPLIED. SEE SHEET 3

△5. SIZES PER MIL-C-5015 (3400 SERIES), MIL-C-26482 (SERIES 2), MIL-C-83723

△6. (SERIES I & III), & NAS1599. SIZES PER MIL-C-81703, SERIES 3.